

Sample Calculation

Pre-Calibration of Weight Indicator using Simulator

Load Cell Specifications: Load Cell Capacity: 1000lbs
Rated Output: 3mV/V
Actual Output: 3.0015mV/V

1) Calculate Units Per mV

$$\frac{\text{Load Cell Capacity}}{\text{Actual Output}} = \text{Units Per mV} \quad \frac{1000\text{lbs}}{3.0015\text{mV/V}} = 333.1667\text{lbs}$$

2) Calculate Units Per Step of Rotary Selection

$$\text{Units Per mV} \times \text{Rotary Selection} \quad 333.1667 \times .2 = 66.63334$$

Results:	Rotary Selection	Reading on Weight Indicator
	0.0	000.00000
	0.2	066.63334
	0.4	133.26668
	0.6	199.90002
	0.8	266.53336
	1.0	333.16670
	1.1	399.80004
	:	:
	3.0	999.50010

3) Connect Excitation and Signal Terminals to Weight Indicator

Use Sense leads from indicator when possible
Connect +Sense to +EXC Terminal Post
Connect -Sense to -EXC Terminal Post

4) Power Up Weight Indicator and allow 5 to 10 minutes warm up time.

5) Refer to Weight Indicator's Service Manual and follow calibration instructions using the results from Steps 1 and 2

This document contains proprietary information and may not be copied in whole or part without express written consent of **CONTROLWEIGH**.

CONTROLWEIGH has exercised all possible care in the preparation of this manual and specifications contained herein. However, **CONTROLWEIGH** is not responsible for any inaccuracies and reserves the right to make changes without notice.

<http://www.controlweigh.com> Email: info@controlweigh.com

Copyright © 2001 CONTROLWEIGH All rights reserved

CONTROLWEIGH TRANSDUCER SIMULATOR Model TS-16VLW



Made in the U.S.A.

1-800-745-4072

847-540-8260

FAX: 847-540-8270


www.controlweigh.com

Email: info@controlweigh.com

Product Specifications

Model#:	TS-16VLW	
Impedance:	350 ohms nominal	
Output Ranges:	<i>Fixed rotary switch</i> 0 to 3 mV/V in 15 steps of .2 mv/v <i>10 turn vernier with locking graduated dial</i> OFF: Rotary selection + 0.0 mV/V FINE: Rotary selection - 0.01 mV/V to +0.2 mV/V MEDIUM: Rotary selection - 0.04 mV/V to +1.0 mV/V COARSE: Rotary selection - 0.08 mV/V to +3.0 mV/V	
Accuracy:	<i>Typical</i> ± 0.007% of full scale ± 0.00021 mv/v or ±1 microvolt, whichever is greater	<i>Max</i> ± 0.015% of full scale ± 0.00045 mv/v
Zero Offset:	<i>Typical</i> ± 0.00009 mv/v	<i>Max</i> ± 0.0005 mv/v
Temp. Coefficient:	± 5 PPM/°C	
Calibration:	<i>This instrument has been calibrated using standards with accuracies traceable to the National Institute of Standards and Technology, derived from natural physical constants, derived from ratio measurements, or compared to consensus standards.</i> <i>A Test Uncertainty Ratio of at least 4:1 is maintained, and complies with applicable requirements of ANSI/NCSL 2540-1, ISO 9002, and MIL-STD-45662A.</i>	
Excitation:	15v ac/dc max (43.75 - 350 ohm load) Load selection of: 1 to 8 350 ohm load cells 2 to 16 700 ohm load cells	
Termination:	Binding posts - accepts standard banana plug or up to No. 14 wire	
Weight:	2Lbs.	
Dimensions:	6.5"W x 8.25"L x 3.6"D	
Enclosure:	Watertight, dustproof case with seal	

Operation & Controls

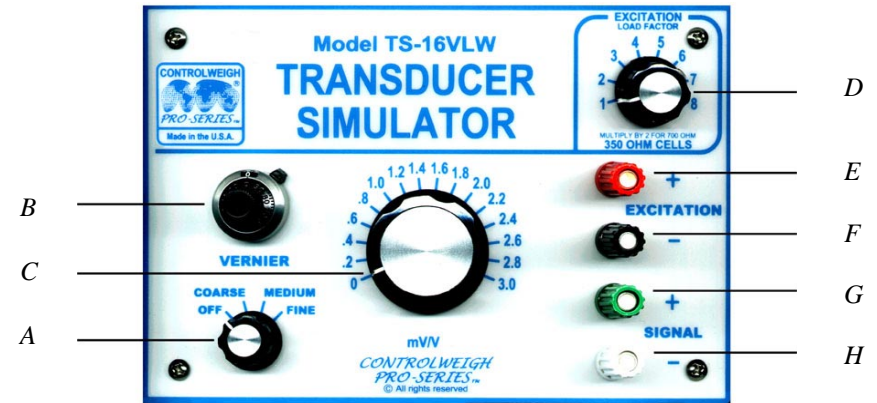

A - Vernier Selection

OFF: Rotary selection with Calibrated Output
FINE: Rotary selection - 0.01 mV/V to +0.2 mV/V
MEDIUM: Rotary selection - 0.04 mV/V to +1.0 mV/V
COARSE: Rotary selection - 0.08 mV/V to +3.0 mV/V

B - Locking Vernier Dial

10 Turn adjustment of selected ranges listed above

C - Rotary Selection

Fixed Calibrated steps of 0.2mV/V from 0 to 3.0mV/V

D - Excitation Load Factor

Rotary selection of: 1 to 8 350 ohm load cells or 2 to 16 700 ohm load cells
Simulates load of multiple transducers in parallel

E - +Excitation Input

F - -Excitation Input

G - +Signal Output

H - -Signal Output

Warning: *Excitation Load Factor should be set to 1 when not performing power supply load testing.*

Make sure power supply will not be overloaded when selecting ranges greater than 1.